



RM 430

Transformation Ratio Meter

The ratio meter type 430 is used for the measurement and check of the transformation ratio of voltage dividers and terminal networks.

The instrument measures the real transformation ratio taking into consideration the influence of the surroundings and including the effect of the measuring cable (which is important especially in the case of damped capacitive voltage dividers).

The connection to the high voltage electrode of the voltage divider and the instrument can be done with a wire of 1 mm diameter. For the low voltage arm the impulse voltage measuring cable shall be preferably used.

The transformation ratio meter has been developed especially for checking-up the transformation ratio of high voltage dividers in the test field.

ADVANTAGES & BENEFITS

- Easy usage
- Real Ratio measured
- Special designed for HV dividers
- Small, portable unit
- Battery powered



APPLICATIONS

The instrument is available as a small portable unit placed in a synthetic housing. The unit is powered from a built-in battery thus enabling measurements at appropriate places on the test platform.

One banana plug or one BNC output respectively is used for the connection to the voltage divider; one LEMO plug and one BNC plug for the low voltage connection.


By pressing a push-button a sine wave of 1000 Hz is applied and the value of the transformation ratio of the voltage divider is displayed digitally.

The ratio read-out remains during approx. 1 min. on the screen then vanishes automatically.

The selection of the measuring range occurs automatically thus eliminating calculations for the determination of the transformation ratio which are time consuming and subject to errors.

TECHNICAL SPECIFICATIONS

Measuring Range	1 .. 9999
Ranging	automatic
Max. load	< 10nF, > 5k
Accuracy	± 1%
Calibration Voltage	1kHz, 90Vpp sine wave
Display	4 digits
Overflow indicator	yes
Supply	Built-in battery with charger
Duration	100 measurements / charge
Battery check	yes
Temperature	5°C .. 40°C
Humidity	5 .. 95% r.h.
Dimensions	190 x 137 x 60 mm
Weight	1 kg

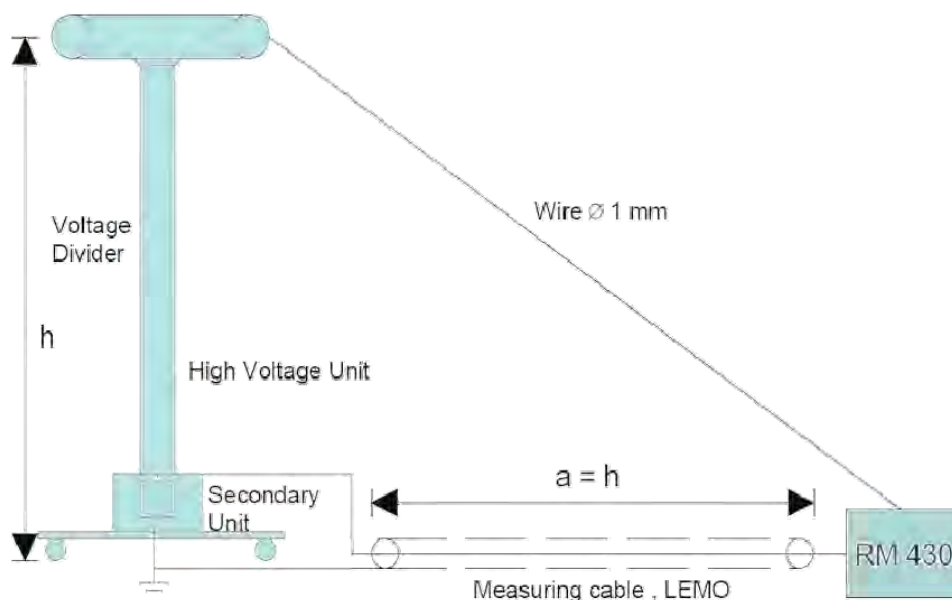

To measure a voltage divider the ratio meter RM430 is connected as shown above

SCOPE OF SUPPLY

- ☒ Ratio Meter type 430
- ☒ Charger
- ☒ Manual

www.haefely.com

Europe, Asia, South & Central America, Australia

Haefely Test AG
Birsstrasse 300
4052 Basel
Switzerland
☎ + 41 61 373 4111
✉ + 41 61 373 4912
✉ sales@haefely.com

China (Sales & Service Office)

Haefely Test AG – Beijing Office
8-1-602, Fortune Street
No. 67, Chaoyang Road, Chaoyang District
Beijing, 100025
P. R. China
☎ + 86 10 8578 8099
✉ + 86 10 8578 9908
✉ sales@haefely.com.cn

North America

Hipotronics Inc.
1650 Route 22
PO Box 414
Brewster, NY 10509
USA
☎ + 1 845 279 3644
✉ + 1 845 279 2467
✉ sales@hipotronics.com

a brand of

HAEFELY 



Haefely is a subsidiary
of Hubbell Incorporated.

