



H306 AC/DC Hipot /Megohmmeter

Insulation Tester and Megohmmeter

■ The H306 AC/DC Hipot and Megohmmeter is an accurate bench type instrument designed to perform insulation tests on all types of electrical system components, assemblies and apparatus. It is designed for ac dielectric tests, dc dielectric tests and insulation resistance measurements with direct megohmmeter readings at 500V dc output.

The AC/DC output configuration eliminates the need for purchasing separate AC and DC hipots. Output connected voltmeter ensures accurate voltage measurements regardless of output loading. They are capable of testing to most industry specifications such as UL, CSA, VDE, IEC, and MIL for dielectric withstand testing.



FEATURES

- ☑ **Continuously adjustable test voltage** from zero to rated voltage
- ☑ **Shielded output** cable
- ☑ **Adjustable Overload** from 10 to 110% of rated current output
- ☑ **Audible/Visual alarms** provide a clear indication of overload situation
- ☑ **Zero start interlock** ensures that the voltage control is at zero before HV can be energized
- ☑ **Shorting solenoid** grounds output cable and object under test
- ☑ **Guard Circuit** bypass unwanted stray leakage currents
- ☑ **Adjustable electronic meter** for accuracy

BENEFITS

Three Tests in One Unit – eliminates need for purchasing separate AC, DC Hipot and megohmmeter

Operator Safety – the power supply and test object are automatically grounded when high voltage is turned off

Meets Industry Specifications – tests to most UL, CSA, VDE, IEC, MIL for dielectric withstand testing

Rack Mountable – easy installation into a 19" rack

APPLICATIONS

- Capacitors
- Transformers
- Wire and Cable
- Coils and Chokes
- Connectors
- Medical Devices
- Appliances

TECHNICAL SPECIFICATIONS

General		H306			
Input Voltage	120V, 60Hz –A version 230V, 50Hz –B version				
Output Voltage	0-5kV AC and 0-6kV dc				
DC Output Voltage	Negative output, positive ground				
Metering	4.5" analog meters, ±2% full scale accuracy				
Voltmeter	0-1.2/6 kV				
Current Meter	0-0.5/5/50/500/5000µA DC and 0-5mA AC				
Overload	Adjustable from 0.5 to 5.5mA				
Megohm Ranges @ 500V DC	X0.1 Multiplier 0.1 to 10 MΩ	X1 Multiplier 1 to 100 MΩ	X10 Multiplier 10 to 1000 MΩ	X100 Multiplier 100 to 10,000 MΩ	X1,000 Multiplier 1000 to 100,000MΩ
Dimensions	21"W x 20"D x 11"H (53cm x 51cm x 28cm)				
Weight	Net 49lbs (22kg)		Ship 59lbs (27kg)		

SCOPE OF SUPPLY

- Qty. 1 H306 AC/DC Hipot/Megohmmeter
- Qty. 1 Input Line Cord, grounded type 6 feet (1.8 m)
- Qty. 1 Ground Lead, 6 feet (1.8 m)
- Qty. 1 High Voltage Output cable, shielded with alligator clip and rubber insulated boot, 6 feet (1.8 m)
- Qty. 1 Calibration Certificate
- Qty. 1 User's Manual

Accessories

Spare Parts Kit **SPK1-H306**

Hipot Test Lead Set **HTL-S**

ORDERING INFORMATION


System

0-5kV ac/0-6kV dc **H306-A or H306-B**

Additional Accessories

- HTP-F, Maximum 25kV Fixed Test Probe
- TC-25, Maximum 25kV Test Cage

CONTROL PANEL

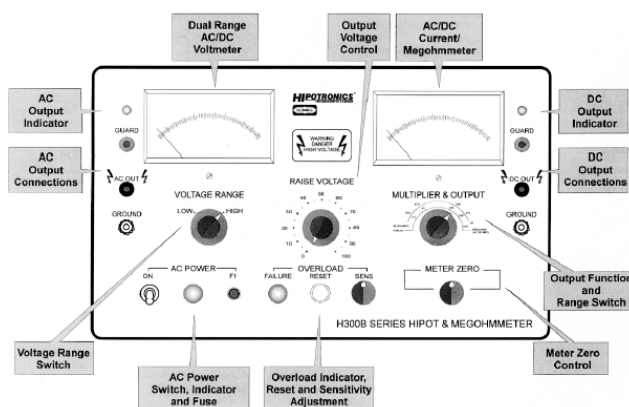

European Contact
Haefely Test AG
Lehenmattstrasse 353
CH-4028 Basel
Switzerland
☎ + 41 61 373 4111
☎ + 41 61 373 4912
✉ sales@haefely.com

Locate your local
sales representative at
www.high-voltage-hubbell.com

USA Contact
Hipotronics Inc.
1650 Route 22
PO Box 414
Brewster, NY 10509 USA
☎ + 1 845 279 8091
☎ + 1 845 279 2467
✉ sales@hipotronics.com