



3370 NK

Standard Capacitors



The Haefely Test AG standard capacitor family from 5 kV to 800 kV

DESCRIPTION

The SF6 insulated standard capacitor is used together with a C and tan delta measuring bridge (e.g. Tettex 2840). As a comparison standard for exact measurements of the capacitance and $\tan \delta$ of HV equipment like cables, transformers, bushings, capacitors, etc. The capacitor is provided with a top electrode which allows partial discharge free interconnections to the other elements of the HV circuit. The SF6 insulated standard capacitor is designed for indoor service and is mobile designed. The standard capacitors of the series NK or 3370 are used for:

- exact measurements of the capacitance and tan delta
- exact measurements of AC voltages (AC divider) in the industrial frequency range (with add. internal electrode or add. secondary part).

The capacitor is built as steel pressure vessel, with bushing for voltages up to 30 kV included. Above this voltage the measuring capacitance Cs is formed by the metallic pressure tank and the corresponding internal concentric electrode. The electrodes are insulated from each other with SF6 gas. All capacitors are fitted with a pressure indicator and filling valve. Surge arrestors protect the measuring output from transients.

SPECIAL FEATURES

For very high voltages a grad with discrete capacitor elements achieves a linear field distribution. These results in higher voltage withstand capability even at humidity levels up to 95 % without condensation. High temperature and voltage coefficient stability is granted.



Standard capacitor 100 kV


TECHNICAL DATA OF NK SERIES

Type NK	Voltage	Capacitance	PD Level at	Type	Height H	Diameter top electrode D	Base frame dimension B	Weight net, approx.
Un	kV	$\pm 3\%$	Un		mm	mm	mm	kg
		pF	pC					
5	5	1000	$\leq 1^{(*2)}$	A	255	---	200	10
30	30	1000 ^(*1)	≤ 1	B	685	---	510	90
100	100	100	≤ 2	C	1340	270	400	40
200	200	100	≤ 2	D	2000	600	1200	180
300	300	50	≤ 3	D	2570	1200	1200	350
400	400	50	≤ 3	D	3120	1200	1200	400
600	600	33.3	≤ 3	D	4300	1200	2200	800
600	600	50	≤ 3	D	4300	1200	2200	800
800	800	50	≤ 10	D	6260	2200	2790	1300
1000	1000	20	≤ 10	E	7980	2500	3020	2000
1200	1200	20	≤ 10	E	8000	3400	3700	3000

(*1): for 3370 NK/1000/30 (1000pF, 30kV) the capacitance specification is $\pm 5\%$

(*2): only up to 2500 V (for NK 5 only)

DESIGN

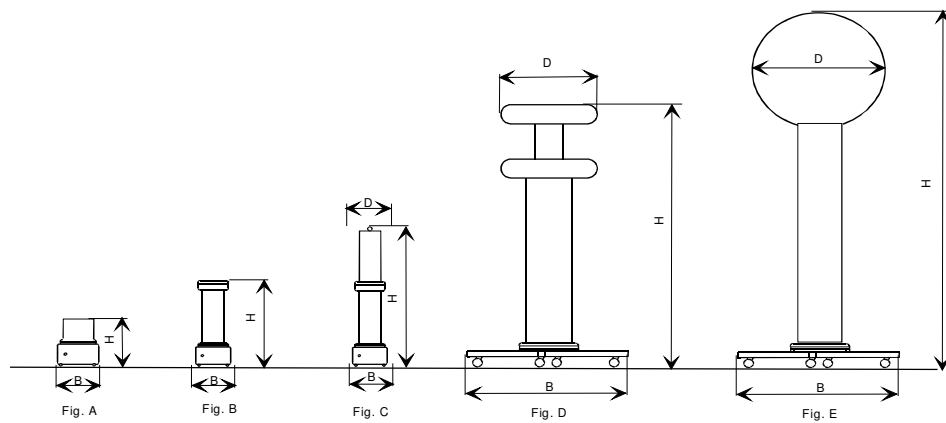

a brand of


HAEFELY



Haefely is a subsidiary of Hubbell Incorporated.



TYPICAL ELECTRICAL DIAGRAM OF STANDARD CAPACITOR

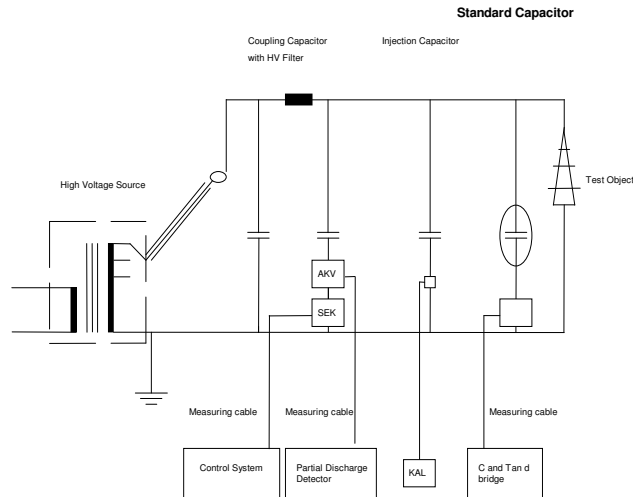

MEASURING OF TRANSFORMER LOSSES

The standard capacitors are used in Transformer Measuring Systems (like TMS 580) due to their very high accuracy as voltage dividers. The components of a typical transformer measuring system are shown below:



Power transformer loss measuring system type TMS 580-100-4000

MEASURING OF AC VOLTAGES

The secondary unit type SEK AC with standard output voltage 140 V RMS is used for voltage measurements with a DMI 551 or any other high precision instrument.

The formed high voltage AC divider will measure in a frequency range of 10 ... 1000 Hz with an accuracy of $\pm 0.1\%$. For simultaneous measurements of $\tan \delta$ values and of AC voltages the standard capacitor must be fitted with an additional internal electrode

MEASURING OF CAPACITANCE AND $\tan \delta$

The standard capacitors are used in conjunction with bridges for measuring capacitance and $\tan \delta$ due to their very stable capacitance and very low inherent losses.



Capacitance and $\tan \delta$ bridge type 2840

GENERAL TECHNICAL DATA

Stability of the capacitance	< 0,01% / year
Loss of pressure	< 1% / year
Service pressure (absolute)	450 \pm 50 kPa
Test pressure (absolute)	1000kPa
$\tan \delta$	< 1 x 10 ⁻⁵
Insulation resistance	> 500 M Ω
Voltage drift (0 ... Un)	< 3 x 10 ⁻⁵
Frequency drift (10 ... 1000 Hz)	< 1 x 10 ⁻⁵
Operating temperature	- 5 ... + 45°C
Storage temperature	- 20 ... + 50°C

COLOURS

Insulating parts	grey-white
Top electrode	RAL9002
Base frame	aluminium galvanised

BASIC SCOPE OF SUPPLY

- 1 standard capacitor with top electrode
- 1 mobile base frame
- 2 spare surge arrestors
- 1 instruction manual
- 1 test report

CALIBRATION

Our basic standard for calibrating each standard capacitor is a PTB (Germany) calibrated internal standard. A standard capacitor should be re-calibrated every year. Haefely Test AG can provide these services, in our Basel works or on-site.

BASIC SCOPE OF SUPPLY

- 1 standard capacitor with top electrode
- 1 mobile base frame
- 2 spare surge arrestors
- 1 instruction manual
- 1 test report

CALIBRATION

Our basic standard for calibrating each standard capacitor is a PTB (Germany) calibrated internal standard. A standard capacitor should be re-calibrated every year. Haefely Test AG can provide these services, in our Basel works or on-site.

ROUTINE TESTS IN THE FACTORY

Normally, the capacitance, $\tan \delta$, and partial discharge values are tested before and after the 1,1 U_n over-voltage test.

TRANSPORTATION

Usually, the capacitors having a rated voltage of less than 800 kV are shipped with their rated SF6 pressure and are therefore ready for immediate use.


For higher voltages the internal pressure is reduced to 120 kPa (absolute) and must be pressurised on-site after installation.

ACCESSORIES (NOT INCLUDED)

- SF6 filling device, including:
 - 1 SF6 filling device with ... kg of SF6 and
 - 1 connection hose with adapted fitting
- Set of HV connections type HSEV
- Secondary part for voltage measurements type SEK AC

SPECIAL VERSIONS

- Additional capacitance C13 for voltage measurement

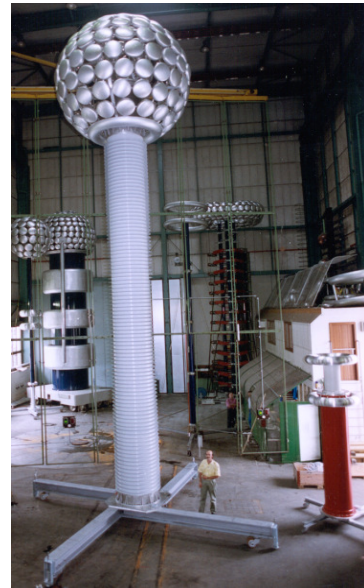

1200 kV outdoor & 600 kV indoor standard capacitors

www.tettex.com

Europe, Asia, South & Central America, Australia

Haefely Test AG
Birsstrasse 300
4052 Basel
Switzerland
☎ +41 61 373 4111
☎ +41 61 373 4912
✉ sales@tettex.com

China (Sales & Service Office)

Haefely Test AG – Beijing Office
8-1-602, Fortune Street
No. 67, Chaoyang Road, Chaoyang District
Beijing, 100025
P. R. China
☎ +86 10 8578 8099
☎ +86 10 8578 9908
✉ sales@haefely.com.cn

North America

Hipotronics Inc.
1650 Route 22
PO Box 414
Brewster, NY 10509
USA
☎ +1 845 279 3644
☎ +1 845 279 2467
✉ sales@hipotronics.com

a brand of

HAEFELY 


precision.
swiss made.

Haefely is a subsidiary
of Hubbell Incorporated.

