



# TDR 1150

## Time Domain Reflectometer

■ **Hipotronics Model TDR1150** is the most advanced and powerful cable fault-locating tool on the market. Used together with a suitable high voltage coupling device, the TDR1150 accurately pre-locates high voltage cable faults in underground transmission and distribution cable systems.

### Basic Mode Operation

Basic mode provides the simplest means of operation for pre-locating most cable faults. The TDR provides step-by-step operation instructions, automatically sets the cable end points, displays the cable length in feet or meters and displays the distance to the cable fault from the hook-up point. The auto range feature fits the cable trace on the screen, regardless of the cable length.

The operator is then prompted to send a single, high voltage pulse down the cable. The TDR displays the high voltage trace, places a fault cursor at the point of the fault, and displays the distance to the fault. There is no need to interpret traces or move cursors. The entire process can be completed within minutes.

### Advanced Mode Operation

Advanced Mode operation provides the operator with complete control and setup access of the TDR functions and settings. Typically this is used in cases where the cable type may be unknown, the cable system has a complex system configuration (loop and network systems) or where the fault may be intermittent. It is password protected to prevent unauthorized use. This mode provides more experienced operators with the diagnostic tools they need to find more difficult faults.



TDR functions that can be adjusted include: propagation velocity, pulse width, gain, 3-phase or single-phase display, and trigger delay. Zoom and cursor features are also fully available to the user in Advanced Mode. In addition alternate languages, memory functions, selectable measurement systems and much more are accessible.

## FEATURES

- ☑ **Automatic Identification** of Key Cable Parameters (cable length and distance to fault)
- ☑ **Quick Location of Faults**
- ☑ **32 Accessible Memory Locations** for Internal Trace Storage
- ☑ **Large 10.4" VGA Color Display**
- ☑ **Automatic Setup** of sampling rate, gain and pulse width
- ☑ **Step-by-Step Instructions** of System Operation Guides User Through Test
- ☑ **Large, Easy-to-Use Buttons**

## BENEFITS

**Multi-Purpose Device** - has ability to pre-locate, locate and diagnose cable faults

**Easy to Use** - device walks user through test procedure; in 5 easy steps you've located the fault

**Compatibility** - TDR1150 can be used with most other High Voltage Couplers

**PC Software and Serial Port** - included with standard unit provides long-term storage, evaluation of test results, defining of test protocols and simple software upgrading

**Reduce Outage Time** - by quickly locating cable faults you reduce outage time and get power back to your customers sooner


**Reduce Cable Damage** - using a TDR reduces thumping and therefore damage to the cable

## APPLICATIONS

These devices are generally used by:

- **Electrical Utilities**
- **Test Companies**
- **Petrochemical Facilities**
- **Facility Maintenance**

## MEASURING SETUP DIAGRAM

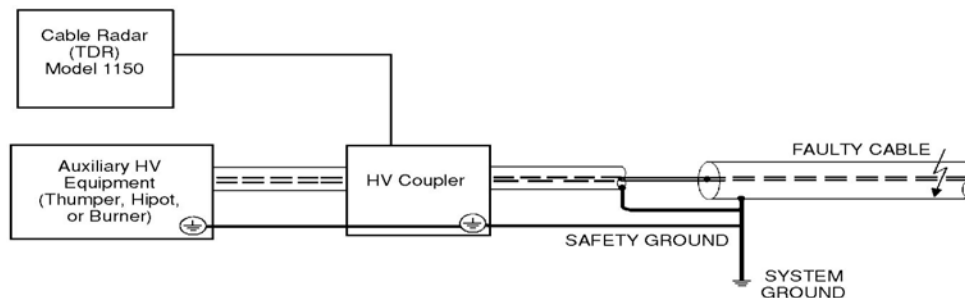

## TECHNICAL SPECIFICATIONS

### General

Power Supply	Battery operated	Charger input	120 V, 50/60 Hz for -A version 230 V 50/60 Hz for -B version
Pulse Characteristics	Pulse Amplitude	25V into 50 Ω	Pulse Width 100ns to 20μSec
Input Protection	480 V AC		
Range	Time 1.28 μSec to 0.66 mSec	Distance	1 foot to 196,000 feet
Measurement Accuracy	Sample Rate 100MHz	Resolution	2.5 feet (10nSec)
Operational Modes	Arc Reflection, TDR Direct, current Pulse		
Storage	Stores 16 sets of 3 traces	or	6 pre-recorded setups with information and 10 sets of 3 trace signatures
Monitor	LCD Display 7.0 inch		
Environment	Operating Temperature	10°F to 122°F (-12°C to 50°C)	
	Storage Temperature	-40°F to 140°F (-40°C to 60°C)	

### Weights and Dimensions (W x H x D, net weight, ship weight)

TDR1150	14" x 9.5" x 6" (360 x 240 x 150 mm)	15 lbs (7 kg)	25 lbs (11.3kg)
---------	--------------------------------------	---------------	-----------------

## SCOPE OF SUPPLY

- Qty. 1 TDR1150 in portable, water resistant case
- Qty. 1 100/240 V, 12 Vdc power supply (PN211212), with 6 ft (1.8 m) cord
- Qty. 1 RG58/U BNC-BNC cable (PN20097), 15 ft (4.6 m)
- Qty. 1 BNC/clip cable (PN210946), 2.5 ft (0.76 m)
- Qty. 1 Serial interface cable (PN210947), 6.5 ft (2 m)
- Qty. 1 Operations Manual and TDR-PC interface software
- Qty. 1 Calibration Certificate

## ORDERING INFORMATION

### System

Time Domain Reflectometer	<b>TDR1150-A</b>
	<b>TDR1150-B</b>
TDR Retrofit Kit to upgrade existing with TDR1150.	<b>TDR-1150-RTRFT</b>

### Accessories

Power supply for TDR-1150	<b>1150-PS</b>
HV Coupler to protect TDR from HV of cable fault locator.	<b>HVC4100 Series</b>
Cable Fault Locaters (Thumper) 30 (8μf) and 70 kV (12 or 24 μf).	<b>CF Series</b>
Controlled Energy Thumpers 1500 J or 2000 J and 8/16/32 kV output.	<b>CET Series</b>
HV Cable Rack with 125 ft of 70 kV cable and 125 ft of safety ground.	<b>8100</b>

European Contact  
**Haefely Test AG**  
 Lehenmattstrasse 353  
 CH-4028 Basel  
 Switzerland  
 ☎ + 41 61 373 4111  
 ☎ + 41 61 373 4912  
 ✉ [sales@haefely.com](mailto:sales@haefely.com)

Locate your local  
 sales representative at  
[www.high-voltage-hubbell.com](http://www.high-voltage-hubbell.com)

USA Contact  
**Hipotronics Inc.**  
 1650 Route 22  
 PO Box 414  
 Brewster, NY 10509 USA  
 ☎ + 1 845 279 8091  
 ☎ + 1 845 279 2467  
 ✉ [sales@hipotronics.com](mailto:sales@hipotronics.com)